## TECHNICAL INFORMATION SHEET

No. 0508-02 25-Aug-05



## For All CINO XS Machines

# Installation Guide for the NRI G13 Coin Acceptor Kit

### Cino Coin Acceptor Kit - part no. 100504 contains:


- 1 x Coin acceptor mounting plate
- 1 x Front plate
- 1 x Lockable cashbox
- 1 x Short cashbox bolt
- 1 x long cashbox bolt

### Cino Coin Acceptor Kit with NRI G13 - part no. 100503 contains:

- 1 x NRI G13 coin acceptor
- 1 x Coin acceptor mounting plate
- 1 x Front plate
- 1 x Lockable cashbox
- 1 x Short cashbox bolt
- 1 x long cashbox bolt

#### **Installation Procedure:**

Remove the coin slot blanking plate from the front of the machine. Place the mounting plate (2) on the rear of the machine door and fix in place with the screws provided (3). Position the front plate (1) on the outside of the machine door and fix in place with the screws provided (3). Push the NRI coin acceptor (4) on the rear of the mounting plate, until it is locked in place with the latch on the plate.

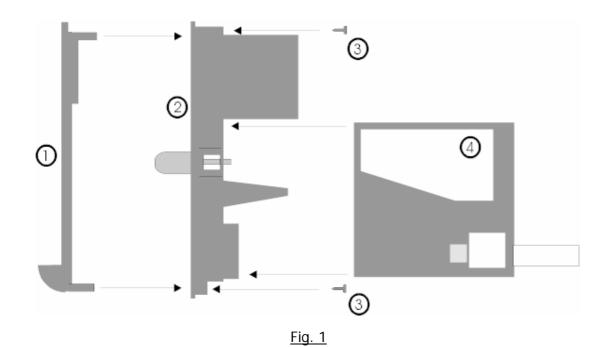

.

rheavendors servomat UK 3 Charlwood Court, County Oak Way, Crawley, West Sussex, RH11 7XA

Telephone: 01293 553332 Fax: 01293 536738 e-mail: info@rheavendors-servomat.co.uk


# **TECHNICAL INFORMATION SHEET**

No. 0508-02 25-Aug-05



Connect the cable shown in Fig. 2 to the corresponding socket on the G13 acceptor.

Mount the cashbox bolts in the holes provided on rear of the door and the spring washer as shown in Fig. 3, the longer bolt is mounted in the lower position. Hang the cashbox on the bolts.






Fig. 2

<u>Fig. 3</u>

Ensure all coins are accepted and that the coin return button operates the acceptor gate.

Note: To accept any coins prices must be assigned in the machines configuration.

Telephone: 01293 553332 Fax: 01293 536738 e-mail: info@rheavendors-servomat.co.uk